

APPLICATIONS

- Self-service island soup display
- Front / Self-service ready to eat soup in heated soup wells
- Rear / Refrigerated self-service packaged Grab-n-Go with forced air refrigeration - medium temperature (36°- 40°)

STANDARD FEATURES

CABINET CONSTRUCTION

- Galvanized steel frame construction
- Finished in high pressure plastic laminate
- Stainless steel interior
- (2) Cup Dispensers / (2) Bain Mariers
- (3) 11 qt. Soup Warmers
- Angled tempered glass sneeze guard

REFRIGERATION SYSTEM

- Self-contained system
- Condensate drains to floor drain
- Energy saving EC motor
- Automatic self defrost
- Solar thermometer and refrigeration control on front of unit

SHELVING

- Three shelves with ticket molding
- Shelves adjust to 3 angles
- Stainless steel deck pans
- LED lights under shelves (and canopy)

ELECTRICAL REQUIREMENTS

- Pre-wired to junction box


WARRANTY

- One year - Parts and Labor

OPTIONS / ACCESSORIES

- Many other laminate finishes available
- Laminated or stainless steel counter top
- Assorted colors for vinyl bumper
- Mirrored or stainless steel interior end panels
- Solid or Glass end panels
- Night curtain (Grab-N-Go side)
- Optional condensate removal devices available to eliminate need for plumbing
- Remote refrigeration

Shown with Optional Finishes

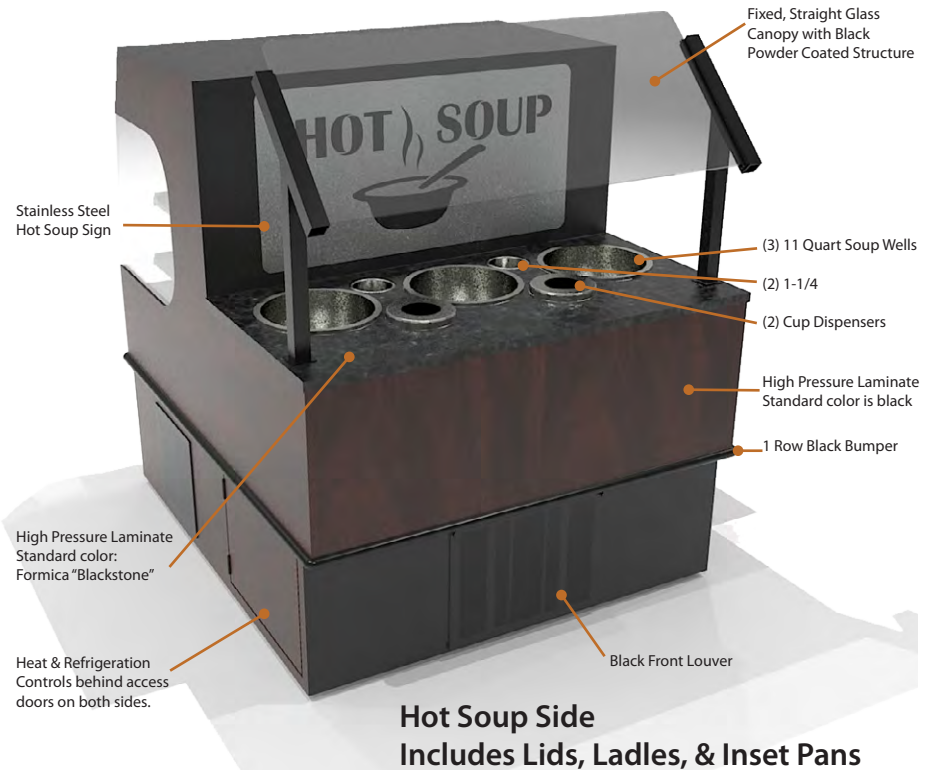





Refrigerated Grab-n-Go Side



Engineered for stores with ambient conditions not to exceed 75°F and 55% relative humidity. Due to continuous improvements specifications may change without notice.

Built to meet the following specifications:



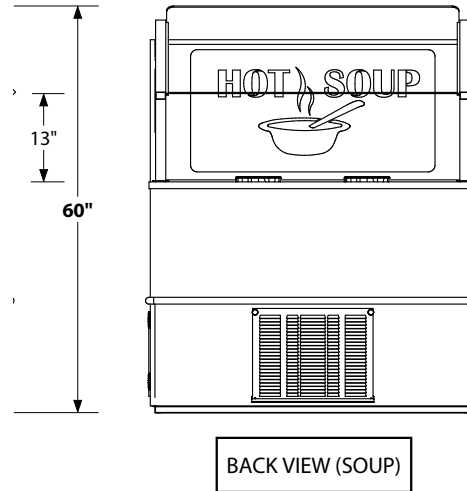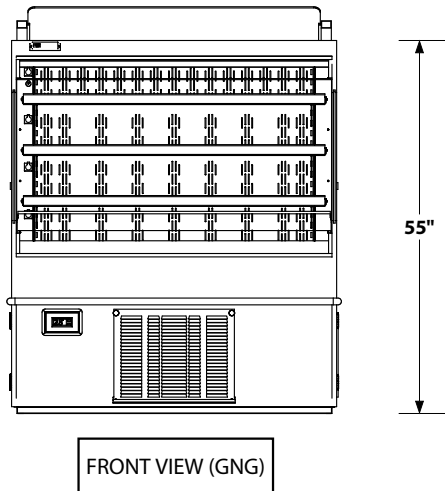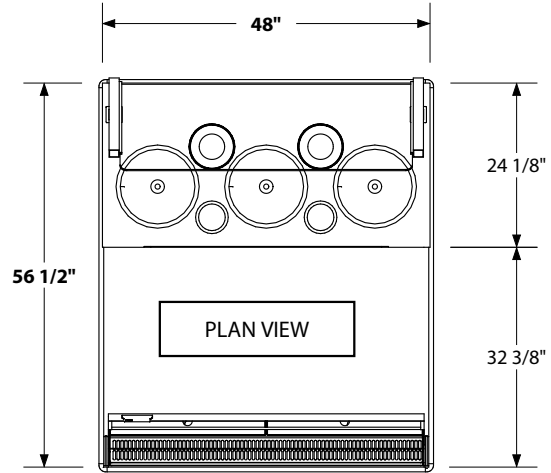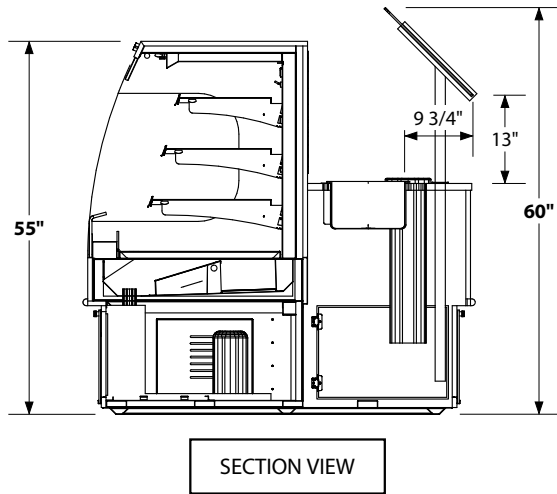

ELECTRICAL/REFRIGERATION SPECIFICATIONS (WIRED TO LOAD CENTER)

COMBO ELECTRICAL SPECIFICATIONS			
QTY	DESCRIPTION	VOLTAGE	AMPS TOTAL
1	CONDENSING UNIT	120	11
1	DIGITAL TEMP CONTROL	120	.25
1	FAN	120	.5
4	34" LED LIGHTS, 3500K	120	1
3	11 QT. SOUP WARMERS	120	19.5
TOTAL ELECTRICAL REQUIRED IS 120/208 V, 60 Hz, 1 PH			32.25

REFRIGERATION SPECIFICATIONS				
QTY	TYPE	BTU'S EA.	EVAP TEMP	REF. TYPE/OZ.
1	AIR OVER DISPLAY	4500	+20°	404-A