

## APPLICATIONS

- Self-service merchandiser for packaged hot foods such as rotisserie chicken, prepared meats
- Incandescent heat lights
- Heated deck plates radiate warmth uniformly

## STANDARD FEATURES

### CABINET CONSTRUCTION

- Base Cabinet to consist of 3/4" plywood panels
- Stainless steel interior
- Finished in high pressure plastic laminate
- One row of protective vinyl bumper guard + corner protectors

### HEATED SHELVING

- Stainless Steel shelves and deck with 3" price tag molding
- NSF-4 Incandescent light fixtures come with shatter resistant, coated bulbs & on/off switch.
- Digitally controlled, NSF-4 heated deck plates radiate warmth uniformly keeping product at optimum temperature.
- Choice of front or rear temperature controls

### ELECTRICAL REQUIREMENTS

- Pre-wired and furnished with a junction box for use on a dedicated 120/208V, 60Hz, 1 phase circuit
- Built in accordance with NEC, UL and NSF standards.

### WARRANTY

- One year - Parts and Labor

## OPTIONS / ACCESSORIES


- Many other laminate finishes available
- Assorted colors for vinyl bumper
- Powder coated interior
- Mirrored sliding rear doors
- Front or rear controls
- Mirrored or stainless steel Accent strip at bottom front
- Contact factory representative for assorted finishes and alternative configurations.



Standard Model Units Shown with custom copper laminate finish.

## 2 models available: Standard & Deep

See reverse for dimensions

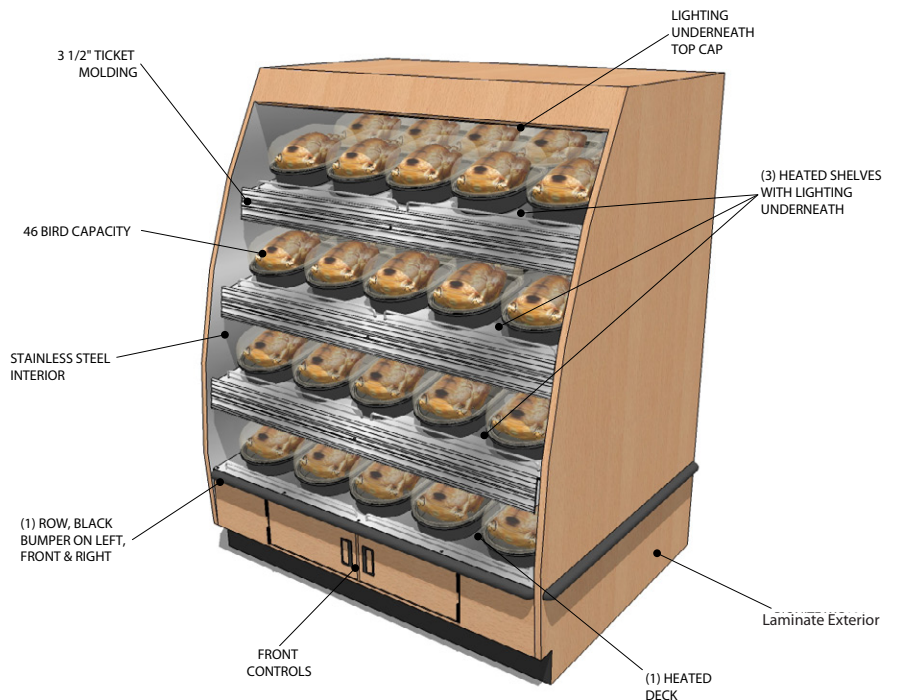


Rendering depicts Deep Model. Shown with custom finish selections.

Engineered for stores with ambient conditions not to exceed 75°F and 55% relative humidity. Due to continuous improvements specifications may change without notice.

Built to meet the following specifications:



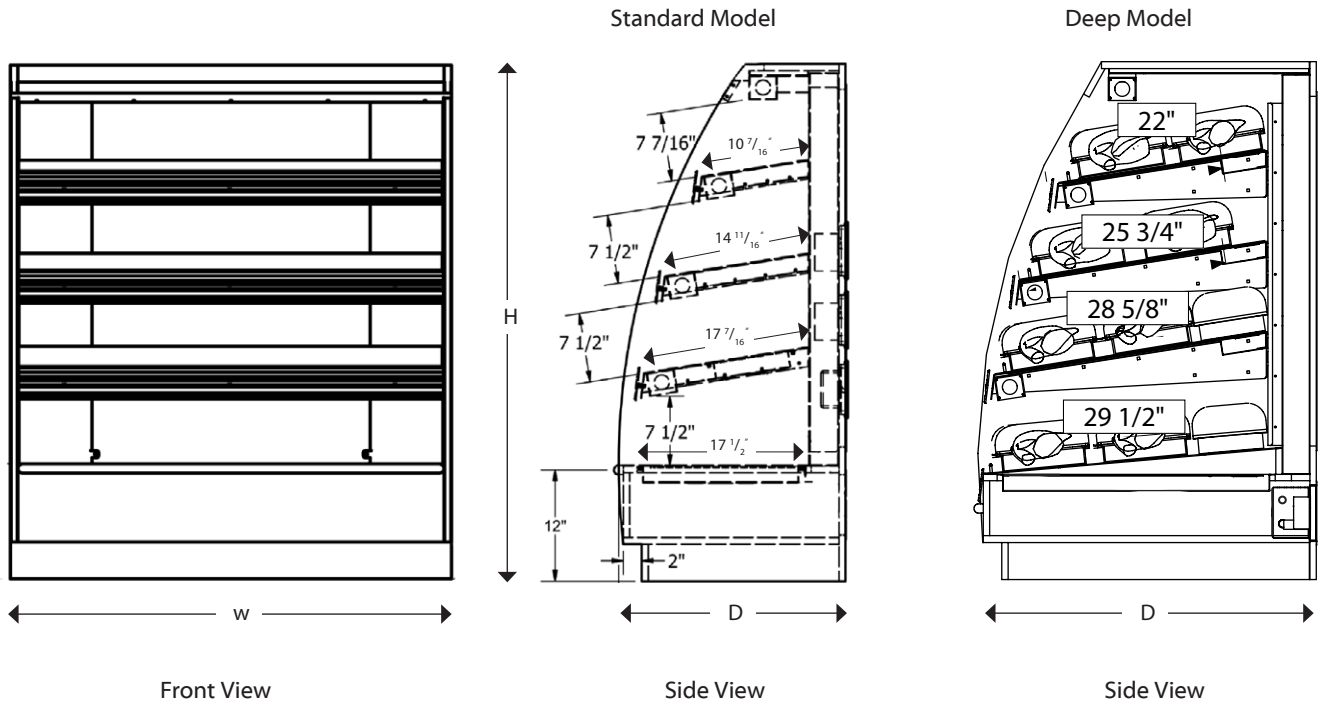

### Standard Model

Unit Width	Capacity (package chickens)	Dimensions (inches)			AMPS
		w	D	H	
4'	28	48	24	56	14.2
6'	44	72	24	56	21.3
8'	60	96	24	56	28.4

### Deep Model

Unit Width	Capacity (package chickens)	Dimensions (inches)			AMPS
		w	D	H	
4'	48	48	36	56	22.8
6'	58	72	36	56	29.5
8'	70	96	36	56	35.2

## ELECTRICAL SPECIFICATIONS - (BASED ON A 4' WIDE STANDARD MODEL)

### ELECTRICAL REQUIREMENTS

QTY	DESCRIPTION	MANUFACTURER	MODEL #	VOLTAGE	AMPS EA	AMPS TOTAL (L1/L2)
4	LIGHTS	HATCO	HL-42-2	120	3.00	6.00
2	BOTTOM 2 FOIL HEATERS	N/A	16 X 44.5	208	2.57	5.13
1	1ST SHELF FOIL HEATERS	N/A	10 X 44.5	208	1.6	3.6
1	2ND SHELF FOIL HEATERS	N/A	14.25 X 44.5	208	2.29	2.29
TOTAL ELECTRICAL REQUIRED IS 120/208 V, 60 Hz, 1 PH						15.03